Lino·Key Keyboard

Another new keyboard from Linotype-Paul produced in three basic versions.

On-Line Non-Justified
Off-Line Non-Justified
On-Line Justified
(with or without punch or tape dispenser)

These keyboards can produce any code structure up to 8 level, in 'on' or 'off' line mode.

Main applications for Phototype-setting particularly designed for any customer configuration.

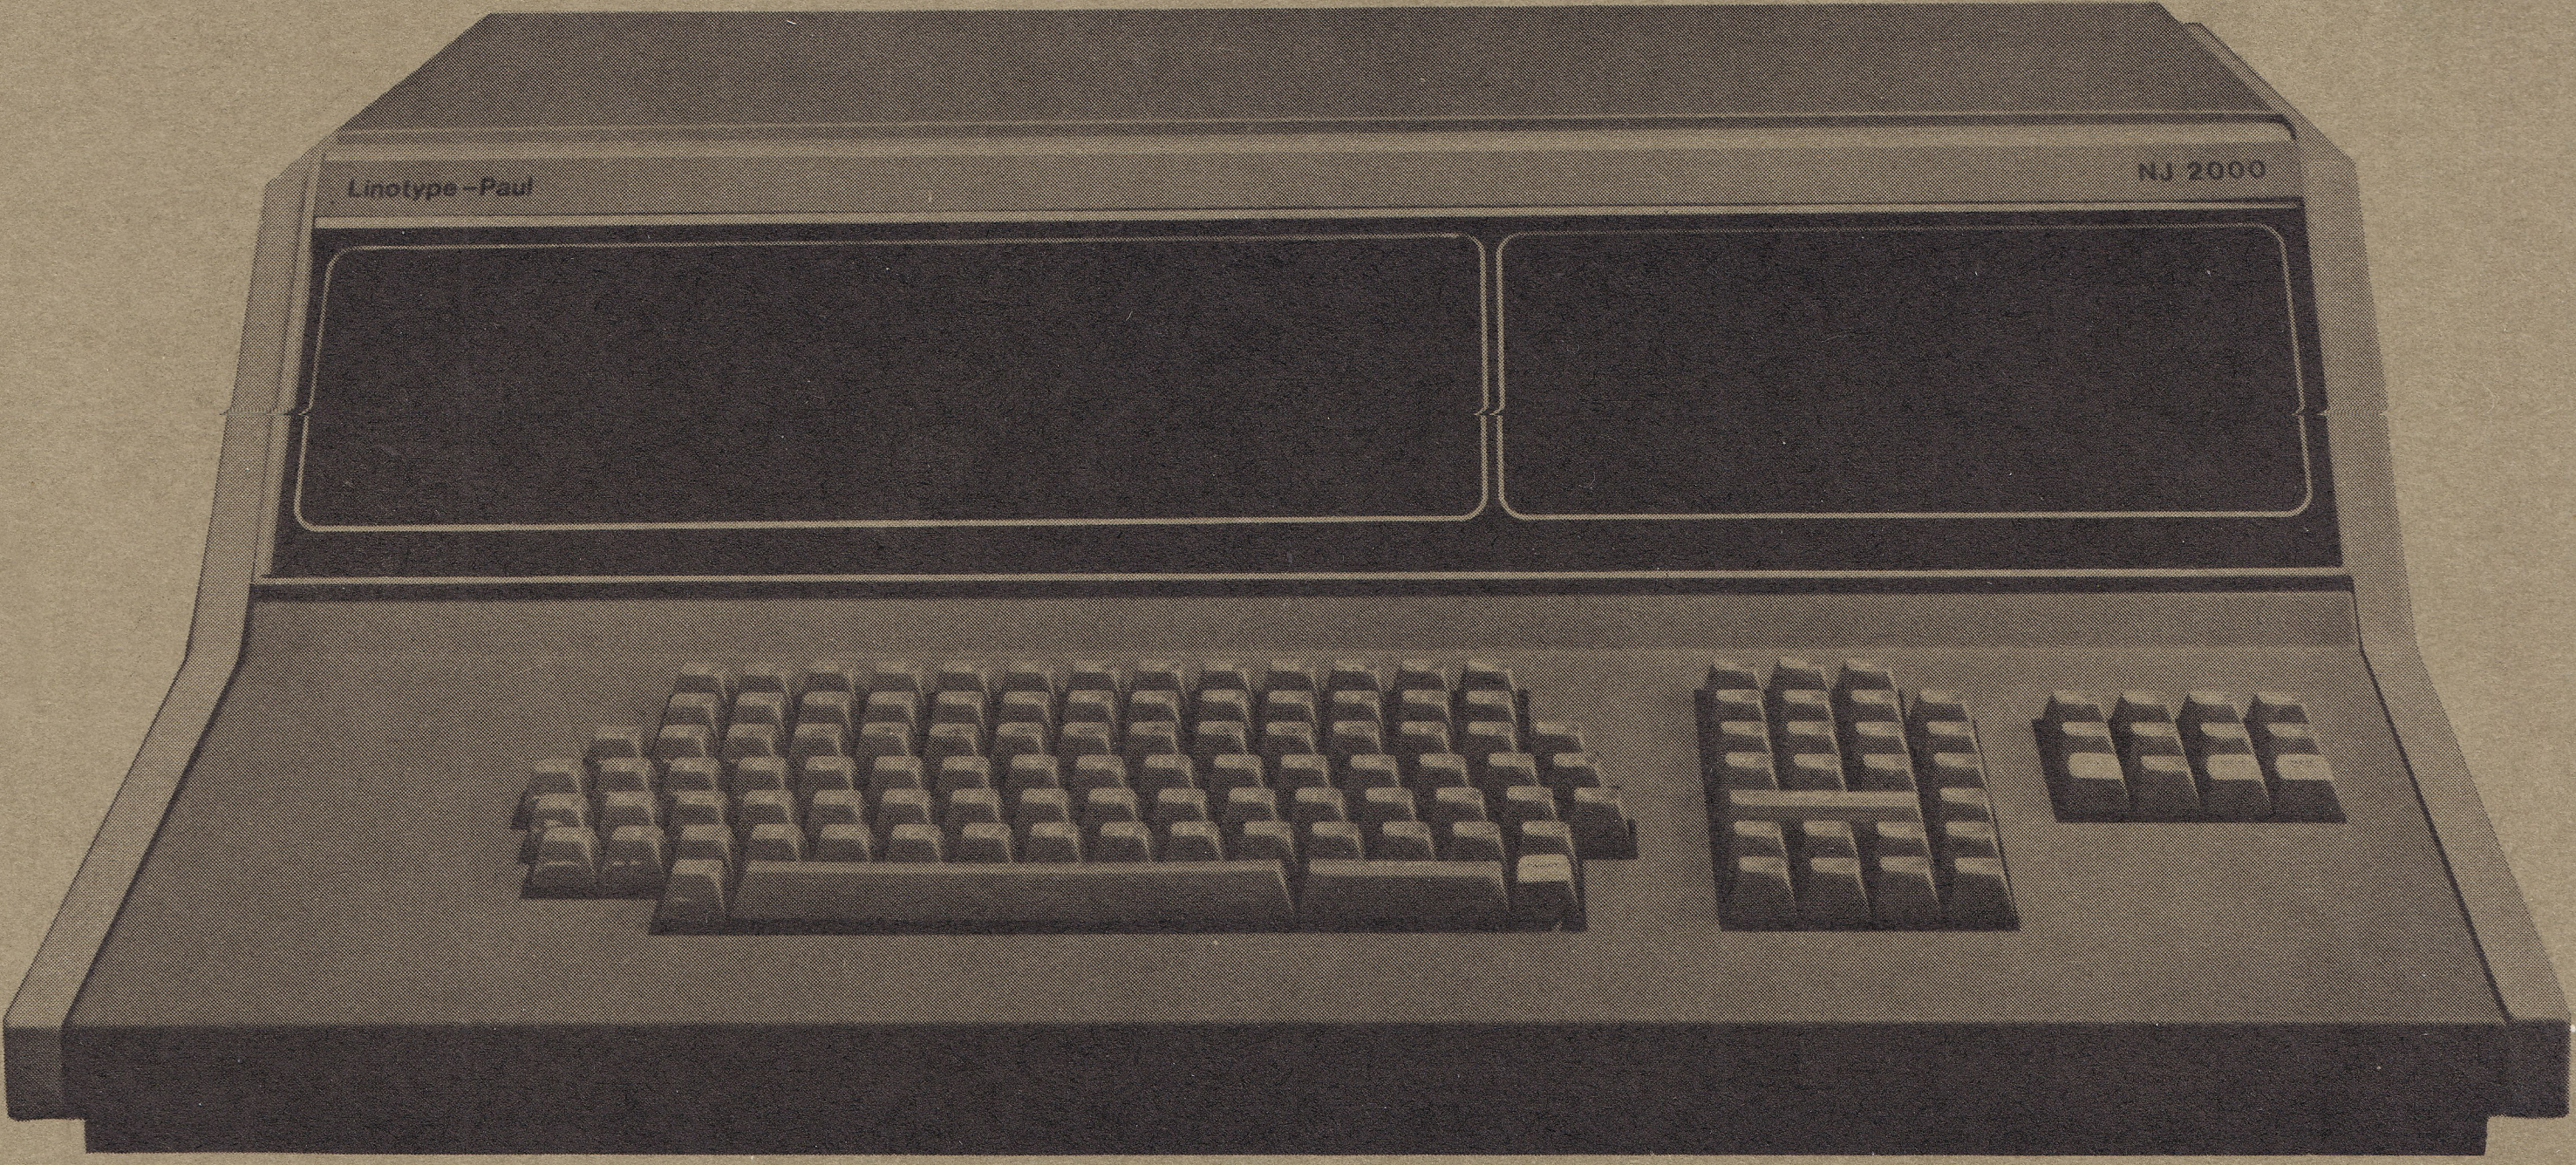

Off Line Version

The keyboard with integral punch (GNT) and tape dispenser is available with all options.

The reliable T.T.S. (advance feed) or computer (on line) 6, 7 or 8 channel punch, with integral 1,000′ (300 M) paper tape dispenser and inside-out winder, is fitted as standard. 40 characters per second.

On Line Version

Any speed from 37.5 to 19K baud, 8 bit, can be communicated to the Phototype-setter computer or Modem by a full duplex serial interface via differential pair cables.

When on line, the distant intelligence may be used to drive 7 numeric displays arranged in two groups of 3 and 4 numeric with plus sign. These can show line length Remainder, point size, film advance, grid and/or font. In addition, up to three indicators can be addressed to show, for example, justify and tight line regions etc.

All versions of the keyboard can mirror existing alpha 2 maths code and layout arrangement.

The punch (GNT) and Linotype-Paul Visualiser if fitted, are controlled by the P.T.S. computer.

An on-line keyboard may be converted to off-line, merely by removing the link to line.

Cable Connection Length

This is dependent on Baud rate of data and cable specification but a typical example is 1,000 ft. (305 Metres) at 9.600 baud.

Customer's Options

All versions have provision for factory fitted, built-in format and text storage facilities, Linotype-Paul visualisers and multi-codes.

Format and Text Storage

An operator programmed bank of 16 locations from the 8 keys can store up to 32 characters (plus associated flags) in a volatile memory.

Visualisers

63 different characters can be displayed, 32 at any one time.

7 × 5 dot matrix gives a bright, flicker-free display to the operator.

Multicodes

The multicode option has the facility for a user selected 32 keys, producing 8 bytes (plus associated flags). This is Firmware programmed by Linotype-Paul.

Versatility

Automatic Key Flags

Any key location can be a Command Flag, Conform, Unshift, Shift or (on V-I-P Keyboards for example) Supershift.

Shift Configurations

Secretarial or T.T.S. systems available. All configurations are Firmware programmed.

These keyboards are able to emulate any Non-Just, Just, Off or On Line or 90 key T.T.S. keyboards previously manufactured by us.

Alpha 2

Alpha 2 mode accesses an alternative structure for any or all Alpha numeric keys. One-shot Alpha 2 or Alpha 2 lock are provided.

Keys

The "No Moving" Part "Hall Effect" light touch key. Regular keys have white engraving on grey. Other colour keys or engraving available. Instruction keys are internally illuminated. Up to a maximum of 153 keys available.

Voltage

Single phase.
110V/240V, 50/60 Hz versions.

Dimensions

Height	23 cms
Depth	60 cms
Width	65 cms On Line 90 cms Off Line with Punch

Linotype-Paul Limited
Peripherals Division, Block 22, Lansdown Trading Estate, Gloucester Road, Cheltenham, Glos.
Telephone 0242 39881